



With a unique combination of style and function, PLUTO fills the gap of accessible power in informal areas. Ideally suited to sharing power in meeting rooms, huddle spaces, cafés, offices and public spaces – PLUTO makes sharing power cool.


PLUTO is available in white, black or eight vibrant satin colors, providing the perfect canvas to add your flair. With optional RAL colors and immersion graphics coupled with four LED ring color options and printed logos, PLUTO has virtually infinite potential finishes.

Fitting a standard 3.15" (80mm) grommet, PLUTO clamps securely in place for through-surface applications. Where mobility is needed, PLUTO comes with a side-entry power cord and rubber feet for freestanding use.




UNIQUE SELLING POINTS:

- 360° access
- Extensive color, screenprint, and immersion graphics, LED accent options
- Choice of AC power sockets and TUF-R A+C 25W USB charger
- Fixed (3.15"(80mm)) or freestanding mounting
- Optional data cartridge
- Easy to clean and maintain

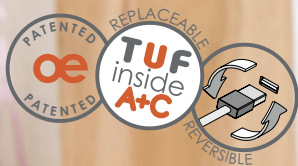


Available Modular Components:

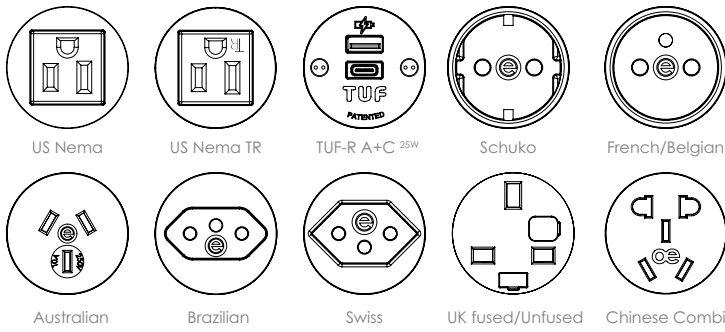


See www.oeelectrics.com for full list of available [modular components](#).

Dimensions:

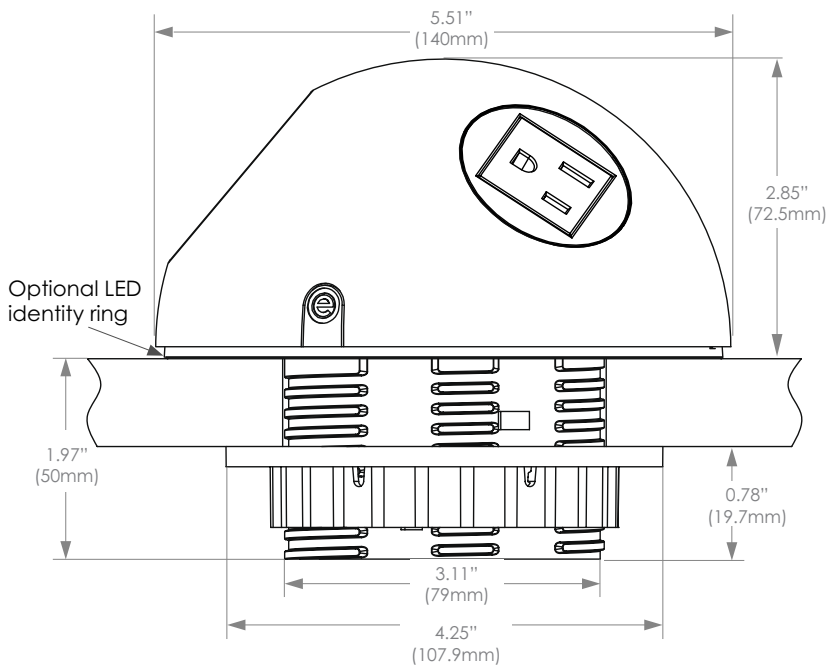

Mounting:

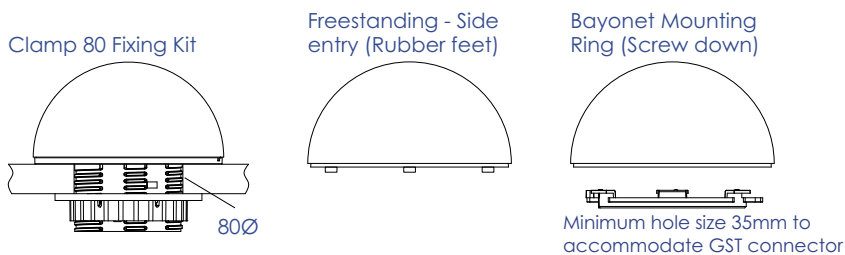

Configuration:

Populate PLUTO's apertures with:

- 42mm power sockets, or
- TUF-R A+C 25W USB charger
- Data/AV connections are options with the PLUTO DATA CARTRIDGE

Colors:

- Dome – Full range of PLUTO color options
Custom finishes to order
- Socket fascia - Black or gray (NEMA TR sockets - black only)
- Power cable - Black
- LED ring – red, blue, green, and white optional

Power and cord:

PLUTO is wired as standard with a 12" 14/3 SJT cord to a male GST connector to be used with [OE's pluggable GST system](#).

Available by special order wired with a NEMA 5-15 cord and plug.

A starter cord is required for GST option: 72" or 108" 14/3 SJT cord with female GST connector, NEMA plug, and Integral OCP standard.

Installation:

PLUTO fits into a standard 3.15" (80mm) grommet hole in table tops up to 1.38" (35mm) deep, using PLUTO clamp 80 kit.

PLUTO can be screwed to the surface using PLUTO Mounting ring.

Freestanding using silicone rubber feet to prevent damage to table surfaces.

Quality and Testing:

All PLUTO units are manufactured using ISO9001 quality controlled components and practices and are 100% inspected before shipment



- Visual: Configuration and appearance
- Power sockets: Continuity, polarity, insulation & grounding
- TUF-R A+C 25W USB charger: Fully function tested, as well as 4 hour "full-load" soak tested"
- Data & AV: 100% continuity tested; all orders are batch tested for performance compliance

"we test every pin in every socket in every module"


Certifications:

cETLus Listed - UL962A/CSA22.2

International certifications available on request.

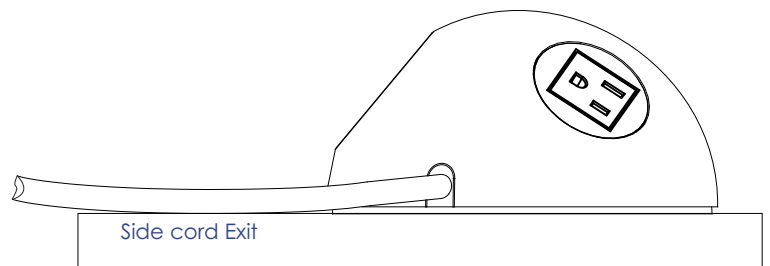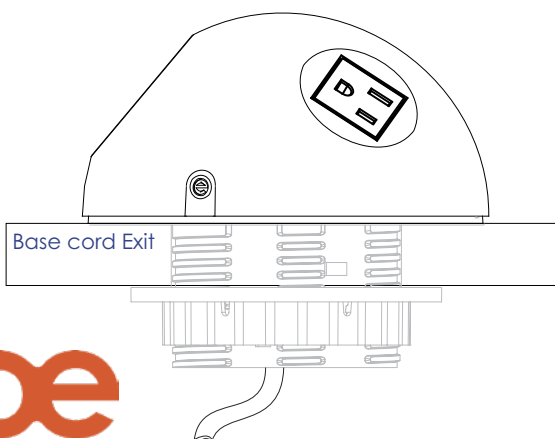

Standard color

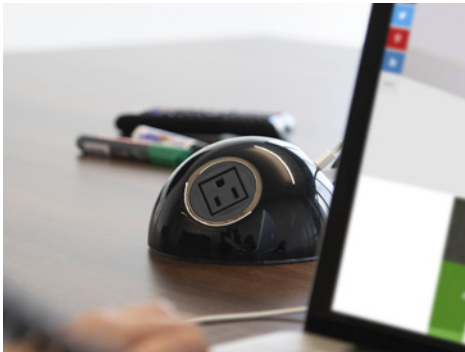

PLUTO is available from stock in unpainted “polished” white or in a range of 10 satin textured paint finishes and can be fitted with black or gray sockets.

In addition PLUTO is available by special order in satin, gloss, or soft touch paint finishes in your choice of RAL color.

For an extra special PLUTO choose one of our immersion transfer prints, or add a printed logo.

As a final personalized touch, add an LED identity ring to the base. Available in red, blue, green or white one of these is sure to be the perfect complement to your finish.

To find out more about tailoring PLUTO to suit your needs, please call our customer support team.

Standard paint finish




Example special colors



Example custom patterns*

(with thousands more to choose from, please enquire)

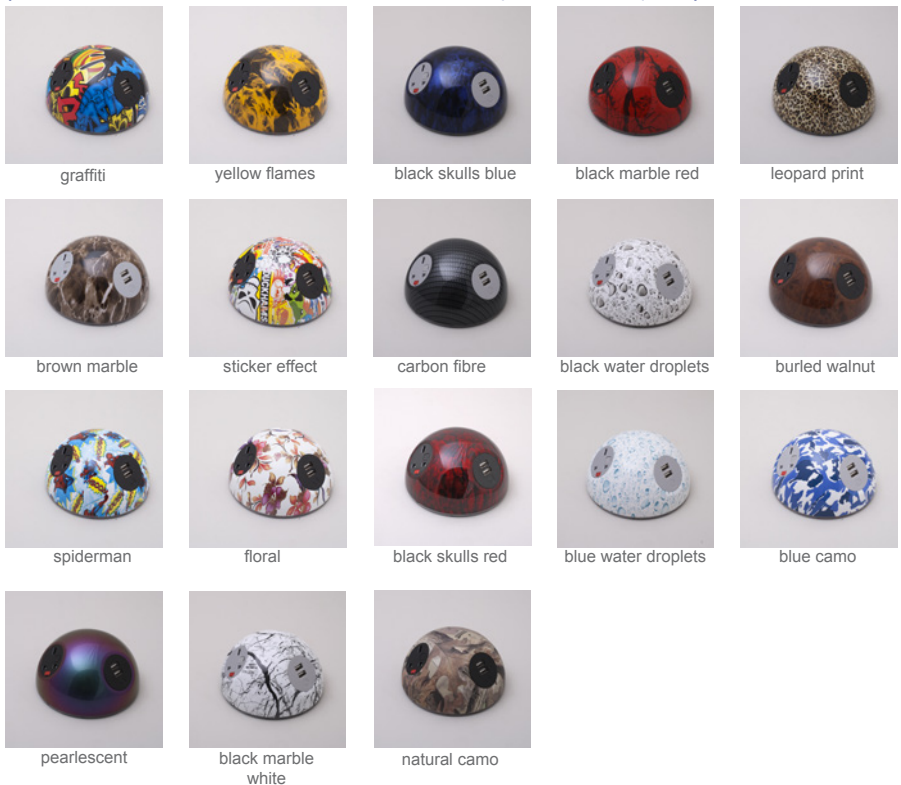

*Please note colors may vary on monitors.

Printed logo examples

